

CognitiveTPG

DLXi Thermal Desktop Label Printer with Bluetooth® Wireless Technology


Field Proven Reliability, Workhorse Performance, and Wireless Bluetooth Option for Versatility Across Industries and Applications



“Built to last... designed to connect,
wirelessly”

The DLXi with optional Bluetooth is the latest addition to mobile label printing options. Robust and rugged are the hallmarks of this label printer. The DLXi combines legendary reliability with the latest communication interfaces including Bluetooth wireless connection. Designed to operate in challenging environments, the DLXi offers an easy to use and seamless migration from our earlier models.

- Bluetooth optional connectivity, supports Android™ and Windows® platforms (iOS® coming soon)
- Same metal frame and construction
- Fast print speeds up to 5 inches per second (127 mm/sec)
- CPL, EcPL and ZcPL programming language resident
- Standard 2 year warranty
- Bluetooth option available on both 2 and 4 inch models

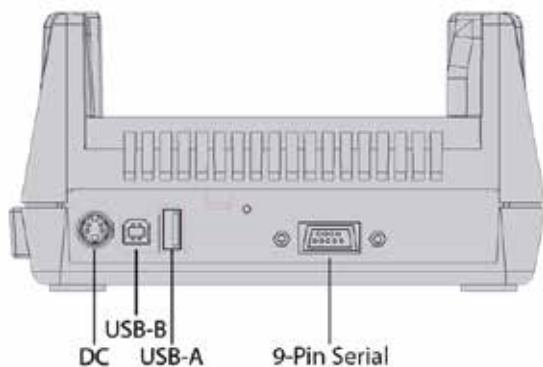

Bluetooth enabled
Thermal Label printer



DLXi Thermal Desktop Label Printer with Bluetooth® Wireless Technology


PRODUCT HIGHLIGHTS

Metal vs. Plastic

This is not a plastic component printer. We understand the environment and workload these printers endure, which is why we use solid metal framing, metal print mechanism and components to give this printer rugged, industrial strength. Known as “The Printer You Can Stand On,” it can stand up to the most challenging environments.

Interfaces provide versatility and flexibility

The DLXi offers several communication interfaces on a 2” and 4” desktop printer including Serial, USB-B and USB-A, and Bluetooth. The USB-A Port allows it to host a wide variety of devices and enables for easy to use updates and stored formats. Bluetooth enables customers to print wirelessly from a smart phone, tablet, or mobile computer.



Bluetooth available on both 2 and 4 inch model

TECHNICAL SPECIFICATIONS

	2 inch Model	4 inch Model
PRINT		
Method	Direct Thermal or Thermal Transfer	Direct Thermal or Thermal Transfer
Width (max)	2.2" (56 mm)	4.1" (104 mm)
Length (max)	322" (8179 mm)	322" (8179 mm) at 203 dpi
Speed (max)	5 ips (127 mm/sec)	5 ips (127 mm/sec)
Resolution	203 dpi (8 dpmm)	203 dpi (8 dpmm)
MEDIA		
Width	1" - 2.4" (25 mm - 61 mm)	2" - 4.25" (50 mm - 108 mm)
Roll Diameter	4.7" (119 mm)	4.7" (119 mm)
Ribbon Length (TT only)	3150" (80 m)	3150" (80 m)
Indexing	Black bar, notch, and gap	Black bar, notch, and gap
Media Caliper	.005" - .01" (.127 mm - .254 mm)	.005" - .008" (.172 mm - .2 mm)
BARCODES		
29 standard bar codes, including Add2, Add5, Codabar, Code39, Code93, Code 128A/B/C, D2of5, I2of5, EAN8/8+, EAN13/13+, EAN128, Maxicode mode 0, MSI/MSI1, PDF417, Plessey, Postnet, UPCA/A+, DataMatrix, Aztec, QR Code, RSS		
FONTS		
Bitmapped	7 styles with up to 10x10 magnification, variable boldness and spacing	
International	Sans serif font in 7 pt. sizes, up to 4x4 magnification, variable boldness and spacing	
Scalable Smooth Fonts	3 Ultra Font styles for smooth characters in any size and boldness	
Rotations	0, 90, 180, 270 degrees	
GRAPHICS		
PCX and BMP formats		
MEMORY		
RAM - 16 MB, Flash - 8 MB		
COMMUNICATIONS		
Bluetooth Model	Bluetooth, Serial (DB9), USB-A & B	Bluetooth, Serial (DB9), USB-A & B
ELECTRICAL		
Auto-ranging 100-240 VAC, 50-60 Hz, 24 VDC Output		
ENVIRONMENTAL		
Operates at 41°F to 104°F (5°C to 40°C)		
PHYSICAL CHARACTERISTICS		
Width (DT/TT)	4.7" (119 mm) / 5.0" (127mm)	6.8" (173 mm) / 6.8" (173 mm)
Height	6.1" (155 mm)	6.1" (155 mm)
Depth	9.4" (238 mm)	9.4" (238 mm)
Weight (DT/TT)	3.1 lbs. (1.41 kg) / 3.9 lbs. (1.77 kg)	3.9 lbs. (1.77 kg) / 4.4 lbs. (2.0 kg)
ACCESSORIES		
Standard	Quick Start Guide, USB cable, power supply and cord	
Downloads from Web site	Windows drivers, programmer's guide, NiceLabel design software, CPL Programmer's Guide and User's Guide	
Optional	Communications cables, label (peeler) dispenser, real-time clock	
WARRANTY		
Printer	24 months from date of purchase (requires registration and excludes printhead)	
PROGRAMMING LANGUAGE		
Cognitive Programming Language (CPL), EcPL and ZcPL language emulation		



Meets strict European standards, such as RoHS & WEEE compliance for non-toxicity of components and recyclability.

COGNITIVE TPG
Innovation built to last

CognitiveTPG, LLC
950 Danby Road, Suite 200, Ithaca, NY 14850
Toll Free: 800.732.8950 Phone: 607.274.2500 Fax: 607.274.2449
www.CognitiveTPG.com
Copyright 2016 CognitiveTPG. All Rights Reserved. 280-0040-01-1214 Rev D